




Sunfish.

JANDENUL.COM

Sunfish.

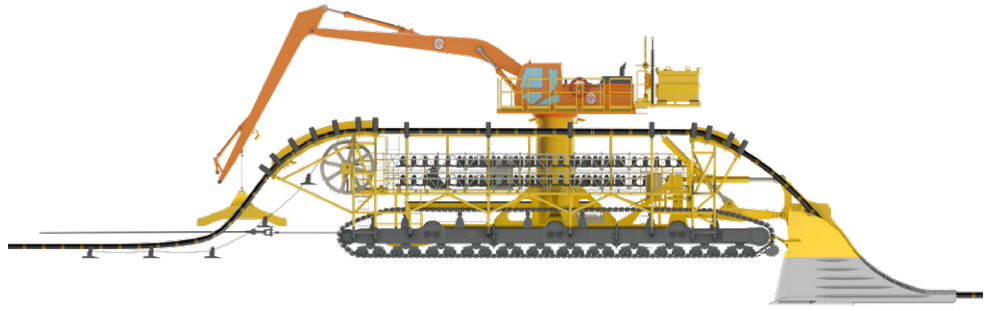

Ploughing Vehicle

VEHICLE SPECIFICATIONS

Operating weight	130 t
Average ground pressure	18 kPa
Traction	120,000 daN
Travel speed	< 1.5 km/h (High) < 0.6 km/h (Low)
Trenching speed	< 0.5 km/h
Engine rated power	202 kW
Fuel tank capacity	1,625 L
Autonomy	30 h
Max. water depth	5 m
Trenching Tool	V-shaped Plough
Auxiliary Tools	recovery system Long reach boom-stick configuration with multiple tool attachments: lifting hook, clamp shell, cable quadrant

OVERALL DIMENSIONS

Overall length	26 m
Overall width	10.6 m
Overall height	8.25 m
Distance between tumblers	15.2 m
Undercarriage length	16.1 m
Overall width of upper structure	4.5 m
Cab clearance	5.2 m
Ground clearance	630 mm
Track gauge	6.35 m
Undercarriage width	8.8 m
Track height	1.95 m
Trench depth	1.8 m



TRENCHING TOOL SPECIFICATIONS

Type	V-shaped Plough
Trench width	386 mm
Trench depth	< 1.8 m
Variable depth range	1 m
Trenching speed	< 0.5 km/h
MBR cable	< 4.5 m
Cable diameter	< 300 mm
Burial depth T.O.P.	< 1.5 m